

JB7515 — 75 × 77 × 16 mm DC Blower Fan

Typical Applications

1. Household Appliances Air purifiers, smart toilets, dishwashers, compact dehumidifiers, coffee machines, desktop space heaters	**2. Automotive** Car ventilated seat cushions, vehicle-mounted air purifiers
3. Industrial & Consumer Electronics 3D printers, compact testing instruments, projectors, beauty & physiotherapy devices	**4. Healthcare** Small nebulizers, portable physiotherapy equipment, mini medical air purification units

General Specifications


- **Motor:** DC brushless motor
- **Frame & Impeller:** PBT plastic
- **Bearing:** Sleeve / Hydraulic / Dual ball bearing
- **Protection:** Impedance protected
- **Life expectancy:**
  30,000 hrs (Sleeve) / 40,000 hrs (Hydraulic) / 50,000 hrs (Ball), continuous operation at 25°C, 65% RH
- **Lead wire:** UL2468 AWG #26; Red (+), Black (–)
- **Weight:** 45 g

Purchasing Information


Sample: Fastest shipment within 3 working days	**MOQ:** 500 pcs	**Delivery:** Ship out within 15 days

Performance Data

Model	Bearing	Rated Voltage	Rated Current (A)	Rated Power (W)	Speed (RPM)	Air Flow (CFM)	Static Press. (mmH_2O)	Noise dB(A)	Weight (g)
JB7515-12L	S, Hy, B	12 VDC	0.14	1.68	2500±10%	5.10	14.0	30.0	45
JB7515-12M	S, Hy, B	12 VDC	0.20	2.40	3500±10%	7.20	20.0	35.0	45
JB7515-12H	S, Hy, B	12 VDC	0.37	4.44	4500±10%	9.00	32.3	40.0	45

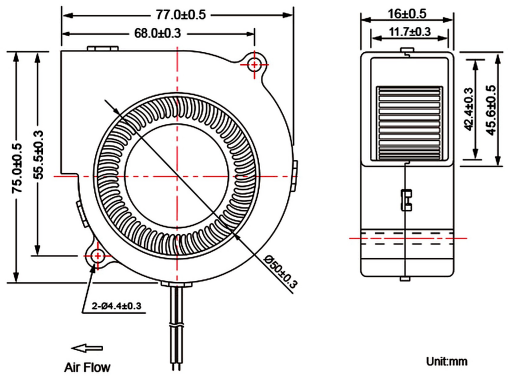

Mechanical Dimensions (mm)

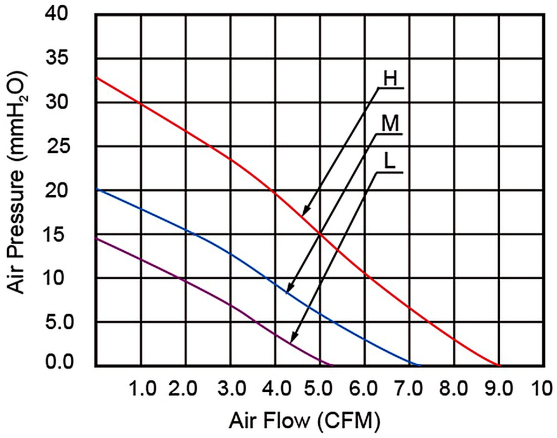

Airflow — Static Pressure Curve